




POP-UP/SWIVEL LIFT SPECIFICATIONS


- HELIARC WELDED STRUCTURAL ALUMINUM CONSTRUCTION
- STEEL RAILS WITH PRECISION NEEDLE BEARING GUIDES
- SMOOTH RACK & PINION GEAR DRIVE
- LAND OR MARINE YACHT CAPABLE
- QUALITY THROUGHOUT

NOTE:
THE PLATFORM CAN BE SET TO SAFELY OVER-RUN THE RAILS BY 1/4" AT EACH END OFFERING 1/2" ADDITIONAL TRAVEL - "C"

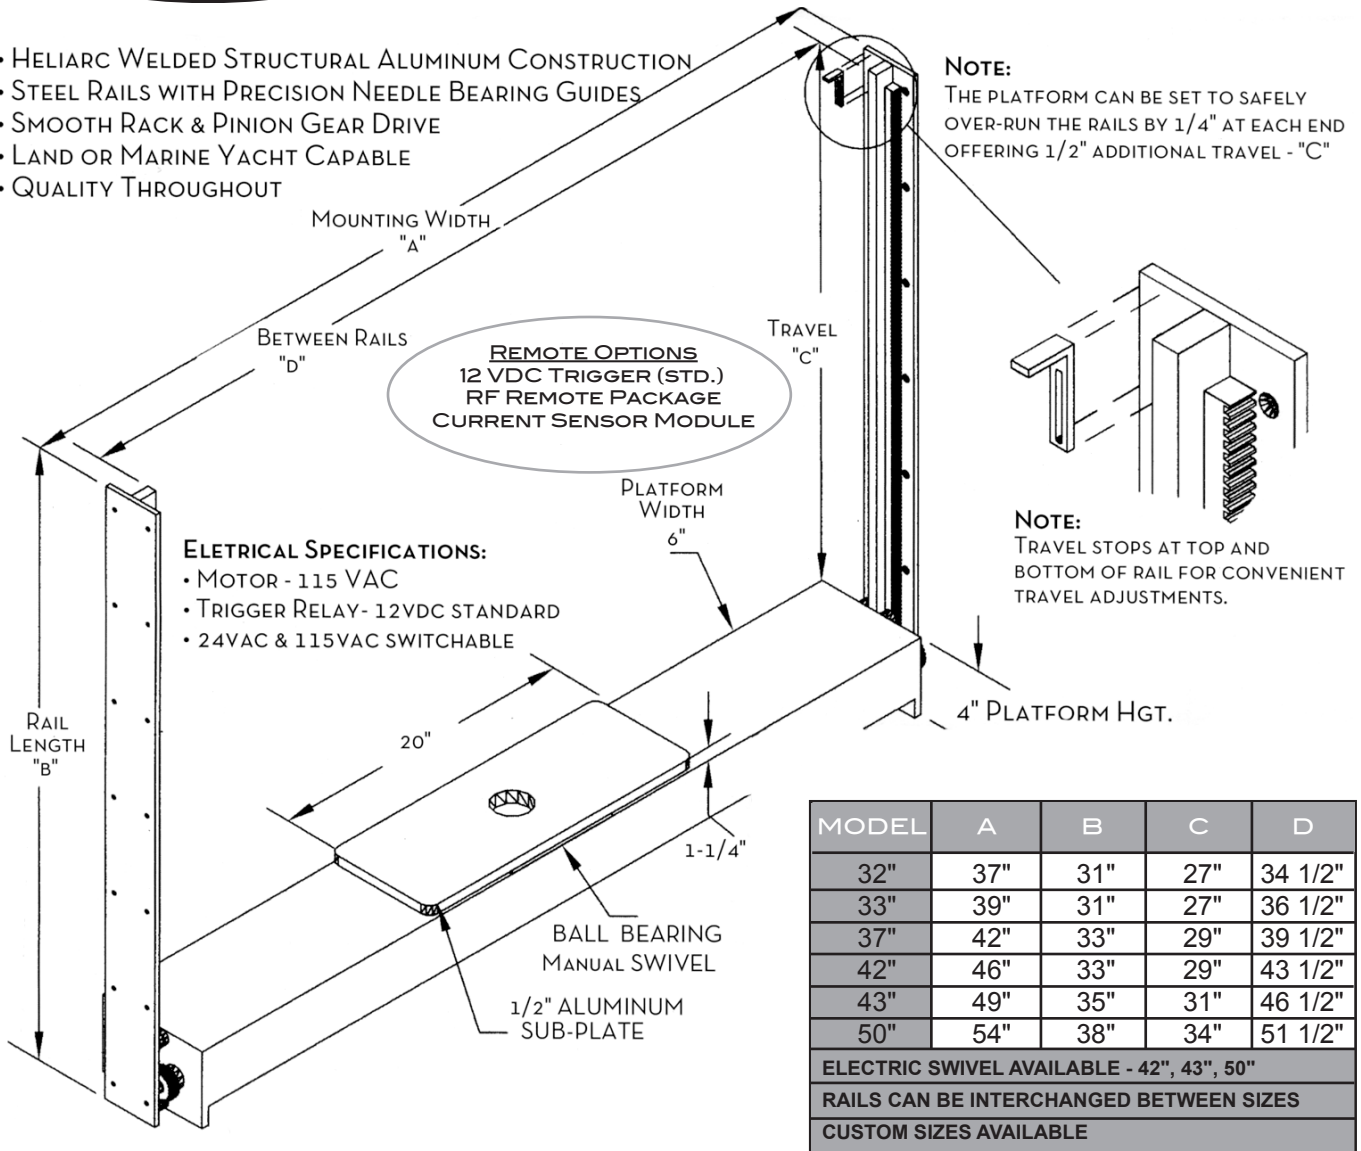

ELETRICAL SPECIFICATIONS:
 • MOTOR - 115 VAC
 • TRIGGER RELAY - 12VDC STANDARD
 • 24VAC & 115VAC SWITCHABLE

REMOTE OPTIONS
 12 VDC TRIGGER (STD.)
 RF REMOTE PACKAGE
 CURRENT SENSOR MODULE

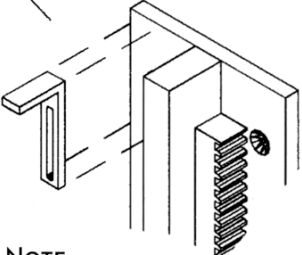

NOTE:
TRAVEL STOPS AT TOP AND BOTTOM OF RAIL FOR CONVENIENT TRAVEL ADJUSTMENTS.

MODEL	A	B	C	D
32"	37"	31"	27"	34 1/2"
33"	39"	31"	27"	36 1/2"
37"	42"	33"	29"	39 1/2"
42"	46"	33"	29"	43 1/2"
43"	49"	35"	31"	46 1/2"
50"	54"	38"	34"	51 1/2"

ELECTRIC SWIVEL AVAILABLE - 42", 43", 50"
 RAILS CAN BE INTERCHANGED BETWEEN SIZES
 CUSTOM SIZES AVAILABLE